

- High flux luminaire with configuration of two directional LED lamp heads
- E-focus programming
- Narrow and Wide light distribution, programmed by the user
- One product applicable for Escape Route or Open area illumination
- Industrial design, wall mounted

Light Source:

12 LEDs Wide, (4W max) 12
LEDs Narrow, (4W max) 200lm,
400lm & 800lm variants

Materials:

Body IP65, polycarbonate
Lamp Head IP65, polycarbonate

Installation:

Suitable for wall and
ceiling mounting

Installation up to 25m (30m)
with optimum spacing of
34.6m (40.28m) for 1lux
(0.5lux) illumination


Cable entries from side &
back and BESA entry

Locking mechanism
on Light Heads

Eaton's BeamLite II, high-intensity double light sources, provide efficient illumination of long, narrow escape routes, but can also provide general wide coverage of a specific area when positioned at any degree specified to each other, in locations where higher illumination is required. Also provides a complete solution from a single luminaire, whether you are providing lighting for a large factory floor, a shopping centre or an entertainment venue.

Rated at IP65 ingress protection and with IK07 impact resistance, BeamLite II can be used in even the harshest of environments while the new design, with compact efficient batteries and LED light heads contained in the same unit, also makes these emergency light fittings applicable for commercial applications.

This range of beam light self-contained luminaires is composed of 1h, 2h and 3h duration versions, from 200 to 800lm light output. The LEDs within the BeamLite II alongside the automatic testing and monitoring devices (using CGLine+ versions) significantly reduces the operating and maintenance costs of the installation.

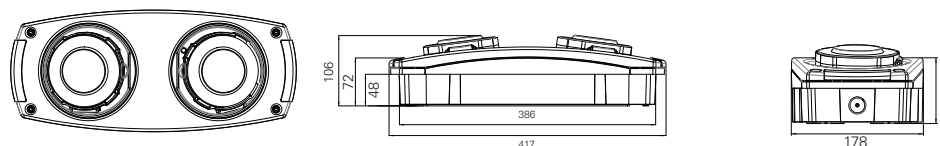

Applications:

Suitable for use in large
open areas (supermarkets,
warehouses, factories,
shopping malls, industrial
units, stadiums etc..)

Order code	Description	⚡	☀	🕒	🔋	⚙
BL2MC-A1	BeamLite II 2x100lm	2.3 VA/ 1.6W	200lm	1h	4Cs NiCd 4.8V / 1.7Ah	Non-Maintained
BL2MC-A2	BeamLite II 2x100lm	2.3 VA/ 1.6W	200lm	2h	4Cs NiCd 4.8V / 1.7Ah	Non-Maintained
BL2MC-A3	BeamLite II 2x100lm	2.3 VA/ 1.6W	200lm	3h	4Cs NiCd 4.8V / 1.7Ah	Non-Maintained
BL2MC-A3CGL	BeamLite II 2x100lm CGL	2.3 VA/ 1.6W	200lm	3h	4Cs NiCd 4.8V / 1.7Ah	Non-Maintained
BL2MC-C1	BeamLite II 2x200lm	2.3 VA/ 1.6W	400lm	1h	4Cs NiCd 4.8V / 1.7Ah	Non-Maintained
BL2MC-C2	BeamLite II 2x200lm	3VA / 2.4W	400lm	2h	3D NiCd 3.6V / 4Ah	Non-Maintained
BL2MC-C3	BeamLite II 2x200lm	5VA/4.5W	400lm	3h	6D NiCd 7.2V / 4Ah	Non-Maintained
BL2MD-C3-AT	BeamLite II 2x200lm AT	5VA/4.5W	400lm	3h	6D NiCd 7.2V / 4Ah	Non-Maintained
BL2MD-C3CGL	BeamLite II 2x200lm CGL	5VA/4.5W	400lm	3h	6D NiCd 7.2V / 4Ah	Non-Maintained
BL2MD-E1	BeamLite II 2x400lm	3VA / 2.4W	800lm	1h	3D NiCd 3.6V / 4Ah	Non-Maintained
BL2MD-E2	BeamLite II 2x400lm	5VA/4.5W	800lm	2h	6D NiCd 7.2V / 4Ah	Non-Maintained
BL2MD-E3	BeamLite II 2x400lm	5VA/4.5W	800lm	3h	6D NiCd 7.2V / 4Ah	Non-Maintained
BL2MD-E1CGL	BeamLite II 2x400lm CGL	5VA/4.5W	800lm	1h	3D NiCd 3.6V / 4Ah	Non-Maintained
BL2MD-E3CGL	BeamLite II 2x400lm CGL	5VA/4.5W	800lm	3h	6D NiCd 7.2V / 4Ah	Non-Maintained

Accessories

Order code	Description
BTLGRID	BeamTech Large/BeamLiteII Grid (54x44x22)