


VELMAG® – SURFACE-MOUNTED

500 daN – contact

Voltage	12V DC	24V DC
Consumption	460 mA	250 mA

TECHNICAL SPECIFICATIONS			
Holding force* 500 daN	Temperature -10 / +55°C	IP rating IP42	Switching capacity 24V DC - 2 A

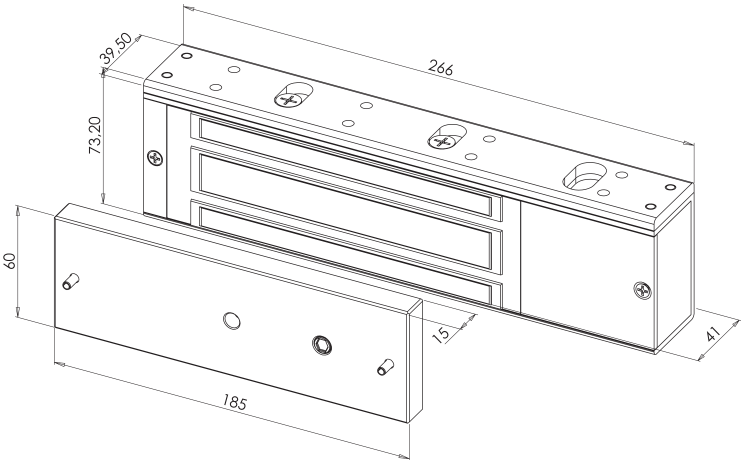

ITEM CODE	DESCRIPTION
V550G	Surface-mounted EML – 500 daN – 12-24V DC – contact
V550N	Black surface-mounted EML – 500 daN – 12-24V DC – contact INTOM RANGE

*Maximum theoretical holding force for implementation respecting optimal installation conditions