


VELMAG® – SHEARLOCK

540 daN – contact

Voltage	12V DC	24V DC
Consumption	420 mA	210 mA

TECHNICAL SPECIFICATIONS			
Holding force*	Temperature	IP rating	Switching capacity
540 daN	-10 / +55°C	IP42	30V DC – 3 A

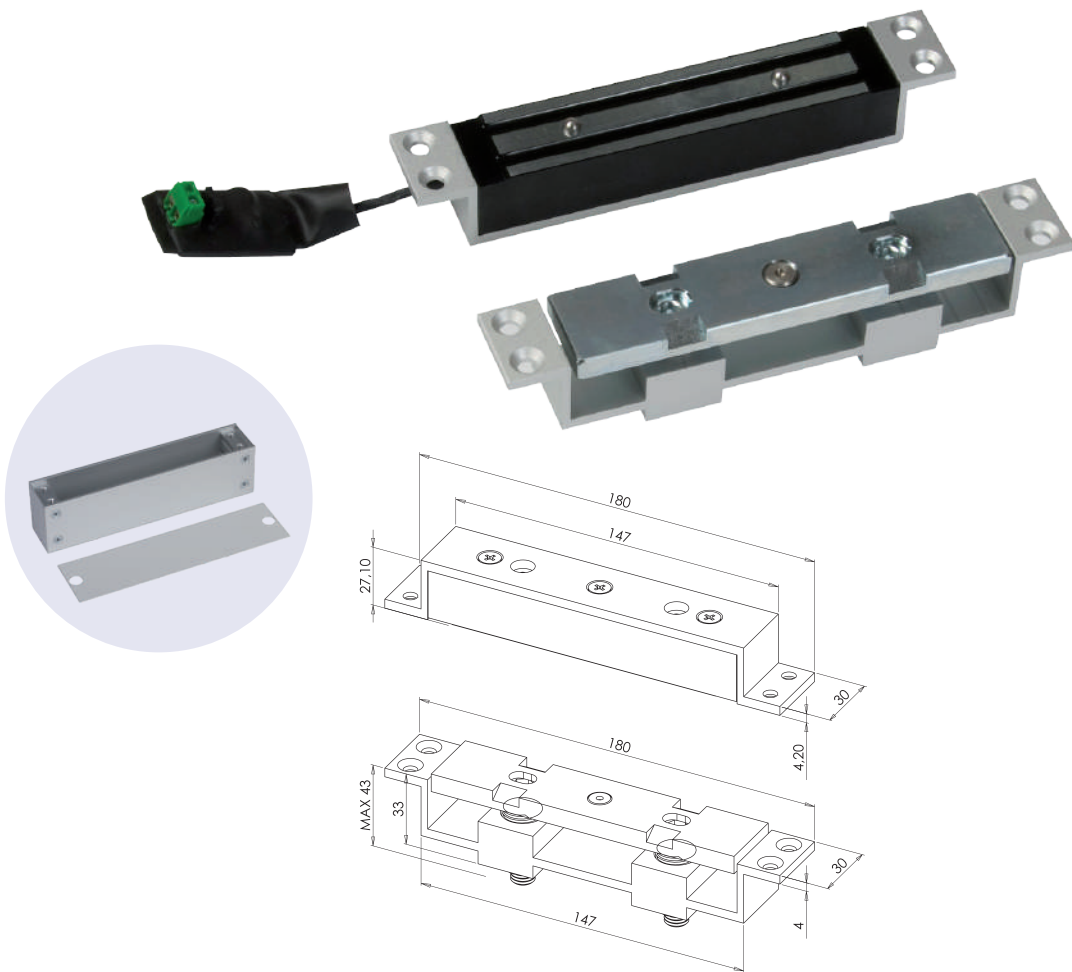

ITEM CODE	DESCRIPTION
SH540CTC	Mortise shearlock EML – 540 daN – 12-24V DC – contact
SH540BT	Surface-mounted box for SH540CTC

*Maximum theoretical holding force for implementation respecting optimal installation conditions