

- High flux luminaire with configuration of four directional LED lamp heads
- E-focus programming
- Narrow and Wide light distribution, programmed by the user
- One product applicable for Escape Route or Open area illumination
- Flexible and modular design, wall and ceiling mounted

Light Source:

12 LEDs Wide, (4W max)
12 LEDs Narrow, (4W Max)
2000lm variant

Materials:

Body IP65, polycarbonate
Lamp Head IP65, polycarbonate

Installation:

Suitable for wall and ceiling mounting

Installation up to 25m (30m)
with optimum spacing of
36.8m (43.1m) for 1lux
(0.5lux) illumination

Cable entries from side & back

Locking mechanism
on Light Heads


Applications:

Suitable for use in large
open areas (supermarkets,
warehouses, cinemas, theatres,
factories, shopping malls,
industrial units, stadiums etc..)

Eaton's BeamTech, high intensity quadruple light sources, provide efficient illumination of long, narrow escape routes. It can also provide general wide coverage of a specific area when positioned at any degree specified to each other, in locations where higher illumination is required.

Designed as an aesthetic alternative to traditional solutions, the battery and configurable light heads are contained in the same unit making it a good choice for public areas. Equally, its IP65 ingress protection and IK07 impact resistance make it perfect for even the harshest of industrial environments.

This range of beam light self-contained luminaires is composed of 1h version, of 2000lm light output. The LEDs within the BeamTech alongside the automatic testing and monitoring devices (using CGLine+ versions) significantly reduces the operating and maintenance costs of the installation.

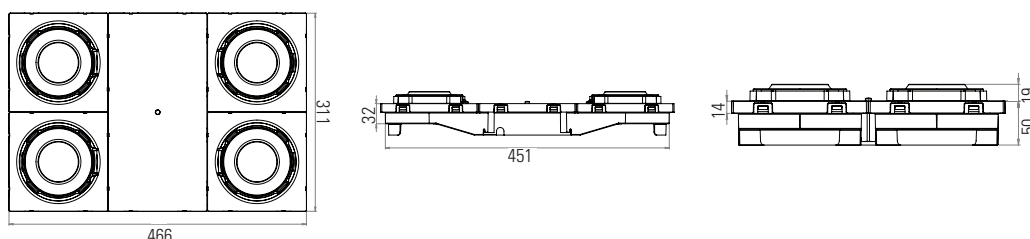

Order code	Description					
BT4LL-G1	BeamTech Large 4x500lm	10VA / 9W*	2000 lm	1h	2x LiFePO ₄ 6.4V / 3.2Ah	Non-Maintained
BT4LL-G1-AT	BeamTech Large 4x500lm AT	10VA / 9W*	2000 lm	1h	2x LiFePO ₄ 6.4V / 3.2Ah	Non-Maintained
BT4LL-G1-CGL	BeamTech Large 4x500lm CGL	10VA / 9W*	2000 lm	1h	2x LiFePO ₄ 6.4V / 3.2Ah	Non-Maintained

* While charging, less than 1W in standby

Accessories

Order code	Description
BTLGRID	BeamTech Large/BeamLiteII Grid (54x44x22)